## WEICHAI

Version 2015A

### Marine Genset- CCFJ100J-W\*

#### **Gen-Set Specifications**

Genset Model	CCFJ100J-W*			
Power Factor	0.8-3 phase			
Frequency	Voltage	Prime		
50Hz	400V	100kW		
60Hz	440V	100kW		

#### **Standard Features**



# Mechanical governor DC24V Electric starter H type insulation Sea water pump Special tool Documents Common high pressure pipe Color: sea blue Packaging: wooden packing case

#### Dual-circulate water-cooled

- Shutoff electronic solenoid
- Spare Parts
- CCS certification

#### Options

◊ Electronic governor	◊ Remote Control Panel
	♦ Alternator anti-condensation
Alternator winding temperature alarm	

#### **Engine Specifications**

Engine Make & Model	Weichai WP6CD132E200 (50HZ)	WP6CD132E201 (60HZ)		
Rated Speed	1500 rpm	1800rpm		
Prime Power	120 kW	120 kW		
Bore & Stroke	105x130 r	105x130 mm		
Displacement	6.75	6.75		
Cylinder Number	6			
Fuel System	Mechanical I	Mechanical Pump		
Governor Method	Mechani	Mechanic		
Aspiration	Turbocharged and	Turbocharged and Aftercooled		
Starting Method	24V electric starter and batte	24V electric starter and battery charging alternator		




#### **Alternator Specifications**

Alternator Make	Marathon/Stamford	
Alternator Model	MP-H-100-4/UCM274E	
Bearing Nos	1	
Insulation Class	Н	
Steady-State Volt Adjustable Rate	≤±2.5%	
IP class	IP23	
Winding Way	12	
Excitation Mode	Brushless	
Rated Power Factor	0.8	

#### **Dimensions**

	Length	Width	Height	Weight	
CCFJ100J-W*	2150 mm	1020 mm	1400 mm	1375 kg	

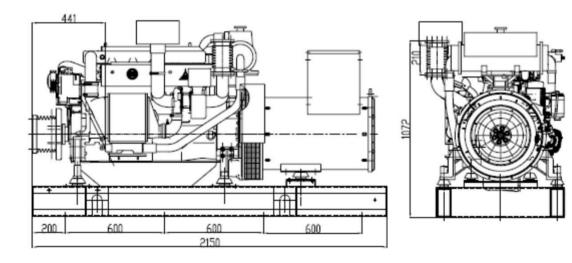

#### **Sales Promises**

Weichai Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty time: 1 year

Service and parts are available from Weichai Power or distributors in your location.



#### PT.JARUM MAS INDONESIA

JI. Pantai Indah Selatan Komplek Sentra Industri Terpadu Tahap III Blok F20-21 Pantai Indah Kapuk,Jakarta Utara 14470 Telp. (021) 5698 2888 Fax. (021) 5698 3188 www.jarummas.com